



PRODUCT DATASHEET

Confidex SteelWING

CONTENTS

1.	PRODUCT DESCRIPTION	2
1.1	SPECIFICATION DATA.....	2
1.2	DIMENSIONS	2
1.3	ELECTRICAL PERFORMANCE.....	3
1.4	RESISTANCE AGAINST ENVIRONMENTAL CONDITIONS*	3
1.5	SUPPORTED SERVICES	3
1.6	POSSIBLE APPLICATIONS.....	3
2.	INSTALLATION INSTRUCTIONS.....	4
2.1	LABEL ORIENTATION AND APPLICATION	4
2.2	PROTECTION OF TAG DURING USAGE	4
3.	ORDER INFORMATION	5

1. PRODUCT DESCRIPTION

With up to 10 meter (32ft) read range on metal surfaces, UHF Class 1 Generation 2 compliant Confidex SteelWING has been designed to overcome the challenges of metal asset tagging. The key design targets; high performance, compact structure and cost-efficiency were achieved with SteelWING’s innovative patent pending design. The light-weight tag has adhesive background and it can be directly attached on metal surface – without any extra spacer material.

1.1 SPECIFICATION DATA

Device type	Class 1 Generation 2 passive UHF RFID transponder
Air interface protocol	EPCGlobal Class1 Gen2 ISO 18000-6C
Operational frequency	865-928 MHz
IC	NXP UCODE G2XM
EPC memory	240 bit
Extended memory	512 bit
Read range	8-10 m / 26-32 ft, reader power 2W ERP
Material	PET
Weight	0,6 g
Delivery format	Single
Tag amount in a box	400pcs (default)
Protection class	IP67
Product is RoHS compliant	

1.2 DIMENSIONS

General dimensions (Width x Height x Thickness)	76.2 x 18 mm (area) x 21 mm (height), thickness 120um 3 x 0.71” (area) x 0.83” (height), thickness 4.7 mil
--	---




Delivery format	76.2 mm x 29 mm / 3” x 1.14”
------------------------	------------------------------



1.3 ELECTRICAL PERFORMANCE

SteelWING G2XM on metal surface

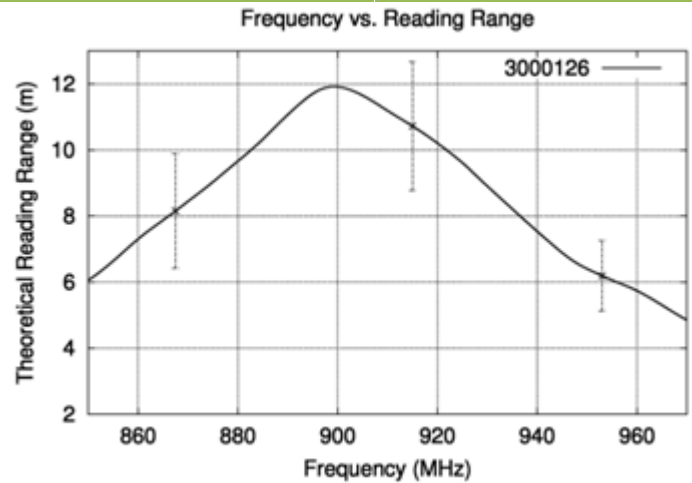

Presented reading ranges are calculated values in non-reflective environment, in where antennas with optimum directivity are used with maximum allowed operating power: EU 865-868 MHz (2W ERP), US 902-928 MHz (4W EIRP), and JPN 952-954MHz (4W EIRP). Variation of 3σ from test batch marked in the picture.

Performance off-metal: Approx. 50% of the maximum on-metal performance value.

1.4 RESISTANCE AGAINST ENVIRONMENTAL CONDITIONS*

Typically values are valid for all tag versions. If not, applicable IC versions are marked

Operating temperature	-35°C to +85°C (-31°F to +185°F)
Ambient temperature	-35°C to +85°C (-31°F to +185°F)
Storage condition	2 years in +20°C / 50% RH (shelf life for adhesive)
Expected lifetime	Years in normal operating conditions

** Values in the table are the best recommendations; resistance against environmental conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product’s final suitability for certain environmental conditions is recommended to be tested. Contact Confidex for more specific information.*

1.5 SUPPORTED SERVICES

There is several personalization options available for Confidex SteelWING in order to “fine tune” the tag to match with the application requirements:

- Pre-encoding
- Data label

For exact specifications, please refer “Personalization Datasheet”.

1.6 POSSIBLE APPLICATIONS

Metal surfaces	Various metal assets incl. industrial returnable transport items and IT assets.
Other surface materials	Plastics

2. INSTALLATION INSTRUCTIONS

2.1 LABEL ORIENTATION AND APPLICATION

Label polarization is along the tag's longest dimension:





Tag fixing

SteelWING tag is fixed on the surface with its background adhesive.

Tag structure consists of two adhesive flaps, which need to be exposed before fixing the tag:

- Open slightly either one of the corners from tag's white side:
- Remove the brown liner and keep adhesive areas away from each other.
Avoid touching the adhesive surfaces as much as possible.

Note: For obtaining the optimum adhesive bond strength, the metal surface should be clean and dry. Ideal application temperature is from +21°C to +38°C (+70°F to +100°F), bond strength can be improved with firm application pressure and moderate heating from +38°C to +54°C (+100°F to +130°F). Application at temperatures below 10°C (50°F) is not recommended.

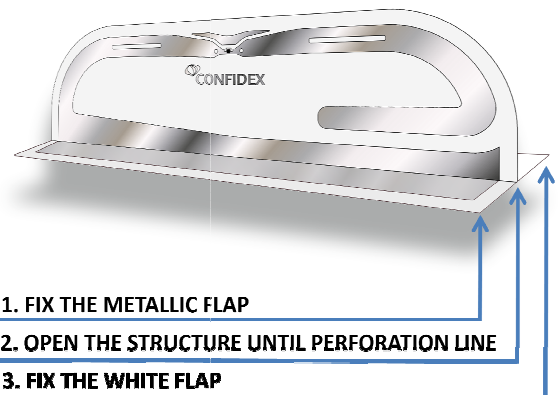

2.2 PROTECTION OF TAG DURING USAGE

Minimum bending diameter of the Confidex SteelWING is defined to be 50mm. Do not bend the tag above the limit. Never touch on the location of the IC. IC chip is sensitive electrical component and can be damaged if unexpected pressure is applied on the chip. Try to avoid mechanical impacts to the Confidex SteelWING. IC and antenna may be damaged due to mechanical shocks.

3. ORDER INFORMATION

Product number	Product name
3000126	SteelWING NXP G2XM

For additional information and technical support contact Confidex Ltd.

FINLAND

Confidex Ltd.

Haarlankatu 1 B, 33230 Tampere, Finland

Tel. +358 10 4244 100 Fax. +358 10 4244 110

contact@confidex.fi www.confidex.fi

USA

Confidex Inc.

1502 Fair Weather Ct., Apex, NC 27523, USA

Tel. +1 919 349 5607 fax +1 810 958 0515

www.confidex.net

CHINA

Confidex China

Guangzhou XinTag Electronics Science and Technology Co. Ltd

3 F Section E Guangzhou Technology Innovation Base

No. 80 Lan Yue Road, Science City, PRC 510663 Guangzhou,

People's Republic of China

Tel. +86 20 3205 7361 fax +86 20 3205 1429

www.confidex.net.cn

DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, CONFIDEX MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN CONFIDEX STANDARD CONDITIONS OF SALE, CONFIDEX AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Confidex products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Confidex products, materials, or services will be safe and suitable for use under end-use conditions.

Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Confidex.